


GAME 45

SPORT & LEISURE APPLICATION



GREAT DURABILITY, LOW MAINTENANCE
AND AN OPTIMAL GAME EXPERIENCE

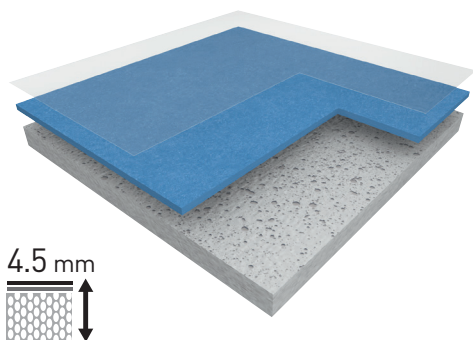

- **Versatile flooring**, ideal for kindergartens, education leisure areas and gymnasiums.
- **Durable product** with a 18µm PUR surface treatment and a high UV resistance that enables long-lasting colour consistency.
- **Easy to maintain solution** thanks to its 18µm PUR surface treatment and its low textured emboss : no scuffing, high cleanability, low maintenance costs.
- Good sports properties for an **optimal game experience**, thanks to a shock absorption of 20%, a coefficient of friction between 80 and 110 and a friction-burn free surface for slight slides.
- Helps to create a **healthy and eco-friendly environment** : a recyclable solution, REACH compliant with a TVOC < 100microgram/m³.
- Backed by Taraflex experience and customer excellence since 1947.



6579
Fog




6572
Water




6578
Leaf



6573
Pond




5746
Light Poplar



5747
Dark Poplar

GAME 45

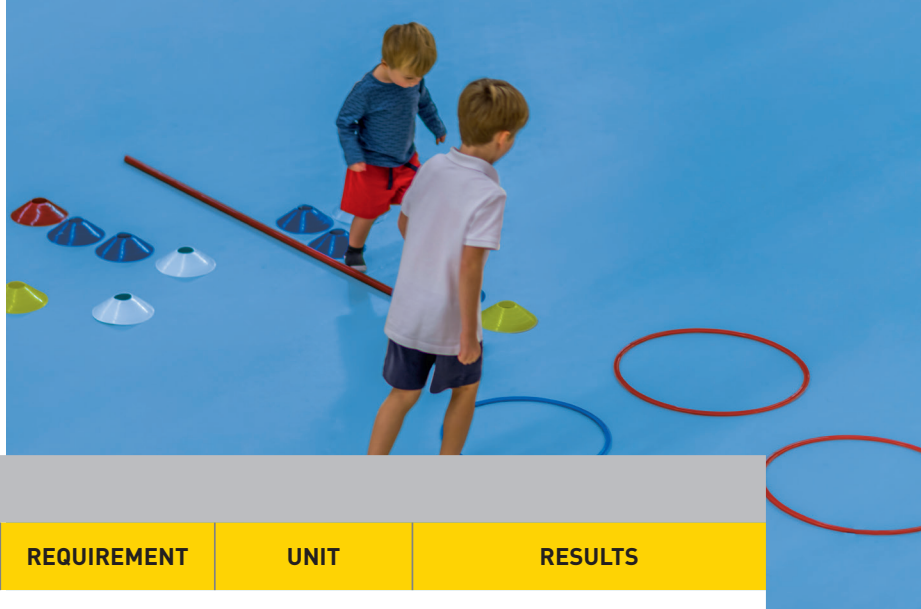

PRODUCT CHARACTERISTICS				
	STANDARD	REQUIREMENT	UNIT	RESULTS
PRODUCT DESCRIPTION				
Surface treatment	-	-	-	PUR
Surface complex	-	-	-	Filled PVC wearlayer
Foam	-	-	-	Open Cell Foam
Thickness	EN ISO 24346	-	mm	4.5
Weight	EN ISO 23997	-	kg/m ²	2.6
Length	EN ISO 23341	-	lm	18
Width	EN ISO 23341	-	lm	2
TECHNICAL CHARACTERISTICS				
Vertical deformation	EN 14809	≤ 3.5	mm	≤ 3.5
Sliding coefficient	EN 13036-4	80 to 110	-	80 to 110
Abrasion resistance	EN ISO 5470-1	≤ 1000	mg	≤ 1000
Indentation resistance	EN 1516	≤ 0.5	mm	≤ 0.5
Shock Absorption	EN 14808	-	%	20
CLASSIFICATION				
Fire	EN 13501-1	-	-	B _f l-S1
Anti-bacterial activity (E. coli - S. aureus - MRSA)*	ISO 22196	-	-	> 99 % inhibits growth
DECLARATION OF PERFORMANCE				
CE	-	-	-	Fire Sliding Coefficient Abrasion Resistance

* The implementation of an effective cleaning method is the best defence against infection